OK-NIC-AE

OK-NIC-AEP

OK-NIC-AEG – Wireless

OK-NIC-AEGP – Wireless

Network MPEG4 Color Camera

Quick Installation Guide

This guide describes the basic functions of
Network Camera.
All detailed information is described in the user's manual.

Warning Before Install

◎ Power off the Network Camera as soon as it is found smoking or smelt unusual.

Contact your distributor when such cases happen.

◎ Keep the Network Camera away from the water. If the Network Camera is wet, power off immediately.

Contact your distributor when such cases happen.

◎ Do not place the Network Camera around the heat sources, such as television or oven.

◎ Refer to your user's manual for the operating temperature.

◎ Keep the Network Camera away from the direct sunlight.



Do not place the Network Camera in high humid environments.

◎ Do not place the Network Camera on unsteady surfaces.



◎ Do not touch the Network Camera when it’s lightening.



◎ Do not disassemble the Network Camera.

◎ Do not drop the Network Camera.



◎ Do not insert any object into the Network Camera, such as needles.

1. Check Package contents

◎ **Wired or Wireless Network Camera**

◎ **Power adapter**

◎ **Camera stand**

◎ **Software CD**

◎ **Quick Installation Guide**

◎ **Antenna for wireless model only**



2. Physical description

◎ Front panel

Microphone

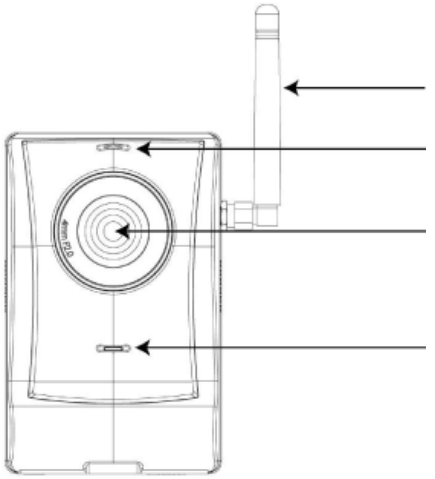

◎ Rear panel

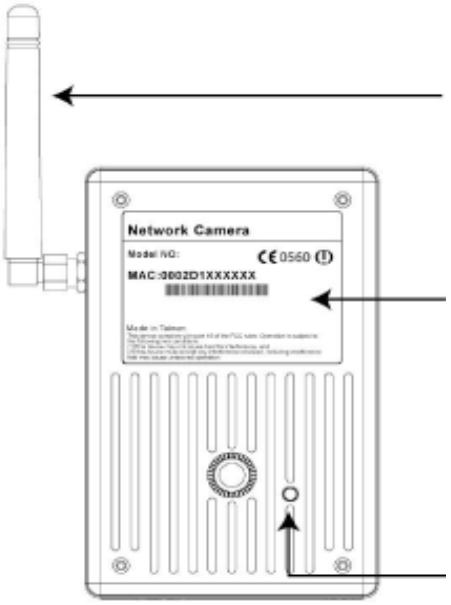

3. Install your Network Camera in Ethernet network

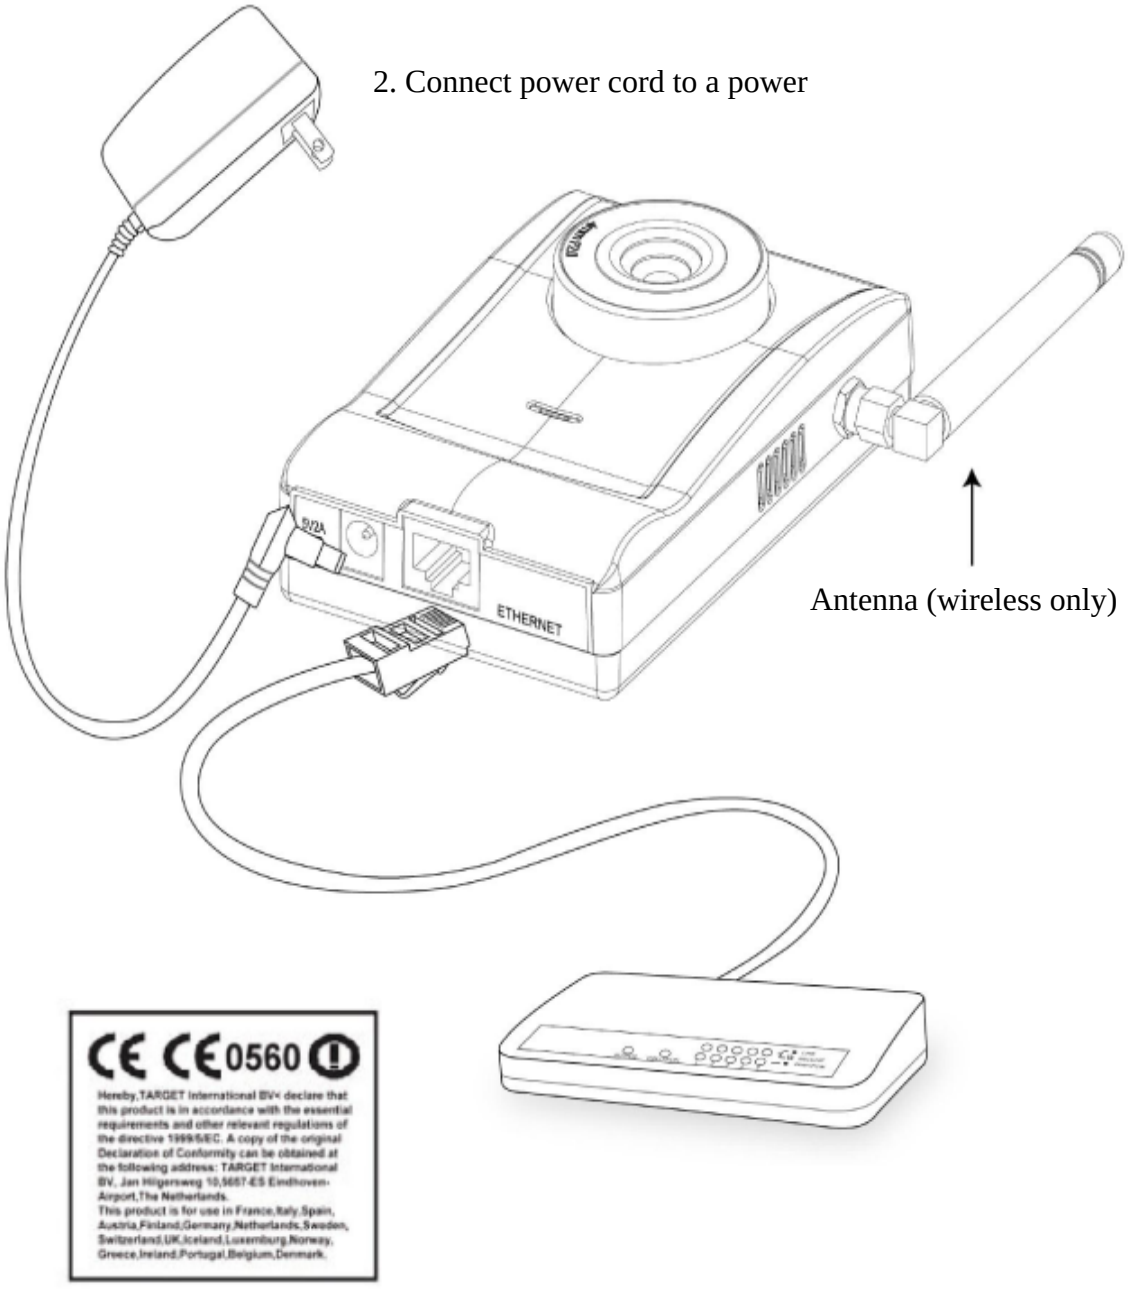
2. Connect power cord to a power
5V2A
ETHERNET
Antenna (wireless only)
CE CE0560
Hereby,TARGET International BV declare that this product is in accordance with the essential requirements and other relevant regulations of the directive 1999/5/EC. A copy of the original Declaration of Conformity can be obtained at the following address: TARGET International BV, Jan Hilgersweg 10,5657-EE Eindhoven-Airport,The Netherlands.
This product is for use in France,Italy,Spain, Austria,Finland,Germany,Netherlands,Sweden, Switzerland,UK,Iceland,Luxemburg,Norway, Greece,Ireland,Portugal,Belgium,Denmark.

1. Use Ethernet cable to make connection from Ethernet port to the hub.

- Use Category 5 Cross Cable when the Network Camera is directly connected to PC.

4. Assign IP address

1. Run the Installer under the Utility directory from software CD.

2. The program will search the cameras on the same LAN.

3. After searching, the main installer window will pop up. Click on serial number that matches the one you just note from **2. Physical description**

4. Click “Link to selected device” to connect the Internet Explorer to the Network Camera.

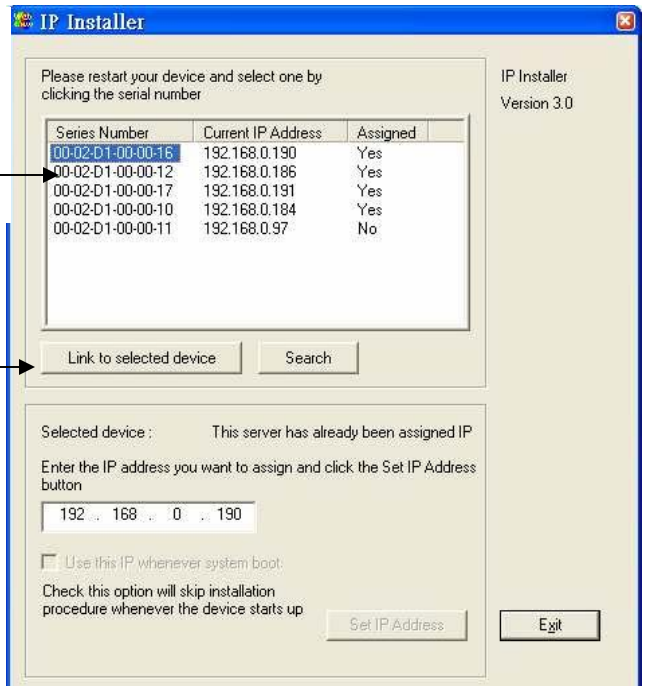

5. The Internet Explorer Connects to the Network Camera

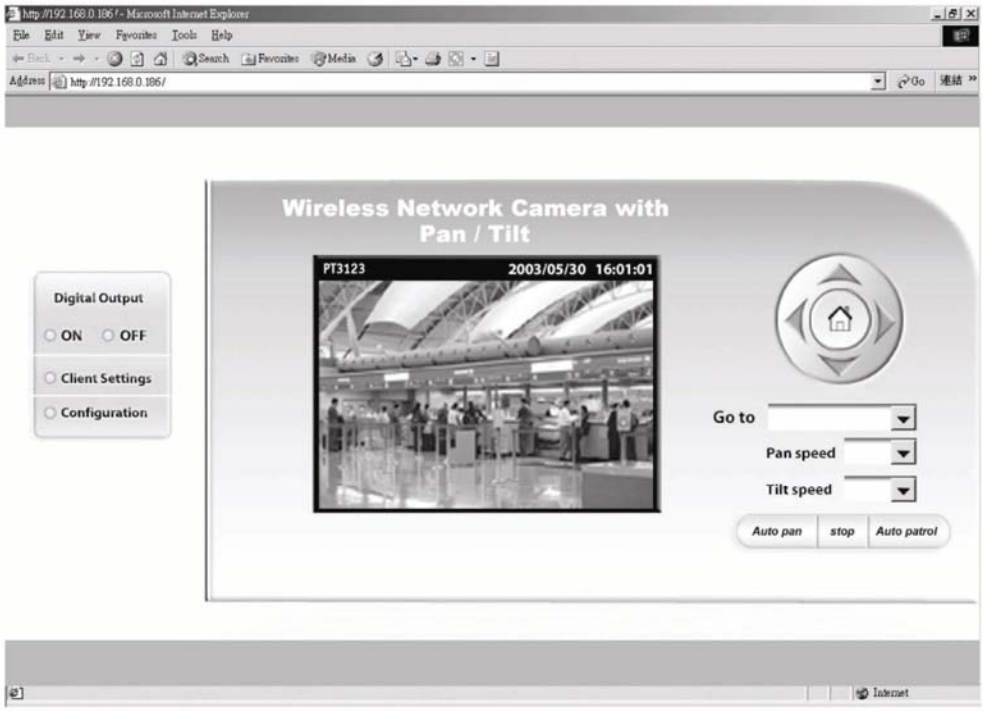

6. Set up Your Wireless Configuration for the Network Camera

(Wireless model only)

1. Check the SSID currently set on your wireless access point (AP).

2. Go to **Configuration > Wireless LAN**

3. Type in the SSID consistent with the setting on your AP.

4. Select t he wireless mode as “Infrastructure”

5. Click **Save**

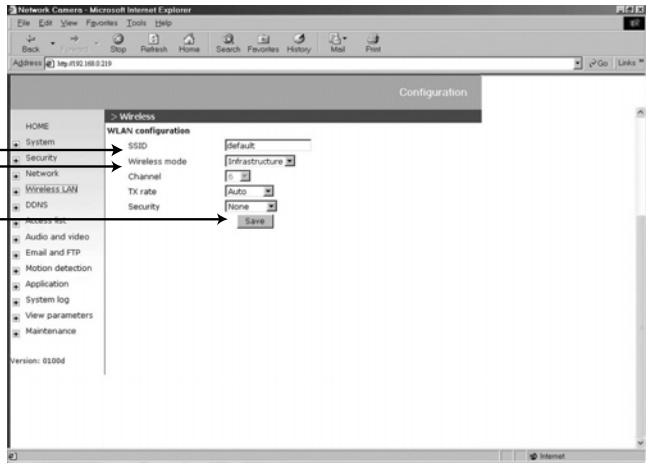

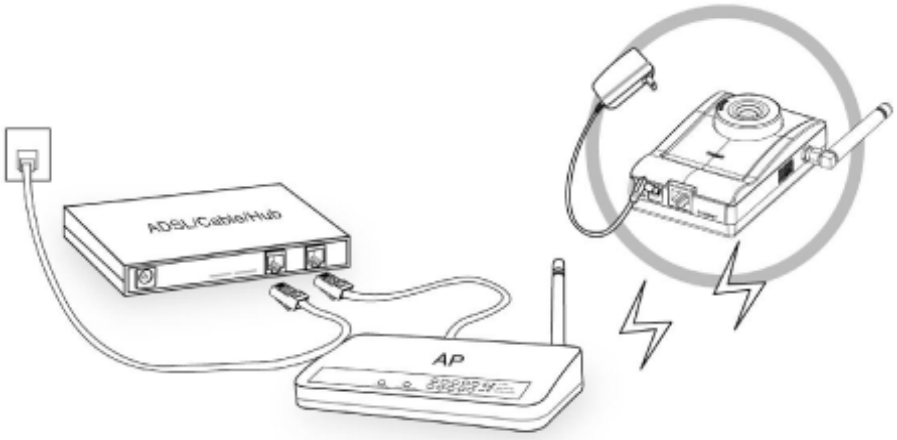

Note:

1. SSID abbreviated from Service Set Identifier is the name to the wireless network. The camera’s factory SSID setting is set to “default “.
2. Select ‘Ad-Hoc” wireless mode if you want the camera to communicate without using an AP or wireless router.

For setup wireless mode and further configuration, please check user’s manual on the software CD.

7. Client Settings (Windows 2000/Me/98E)

At the initial access to the "Connection type" page in Windows, the web browser will ask for a new plug-in installation, the plug-in being the Network Camera. This plug-in has been registered for certification and can be used to change the parameters at the client's site. The user may click on to install the plug-in. If the web browser does not allow the user to complete the installation, check the Internet security to lower the security level or contact your IT or networking supervisor.

1. **Initial IE browser, select function item "Tools"-> "Internet Options"**

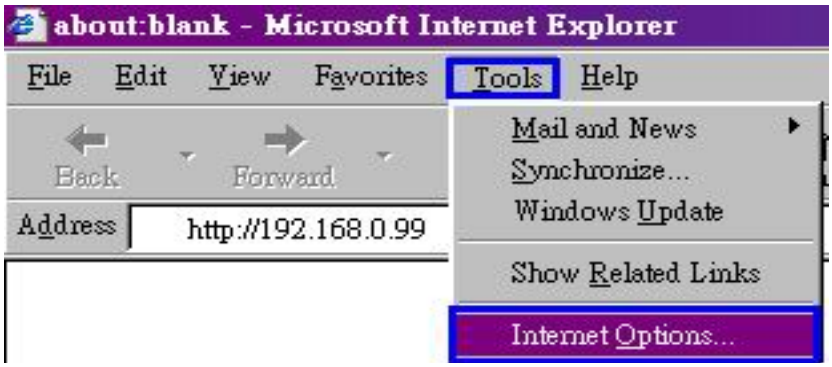

2. **Security-> Default Level**

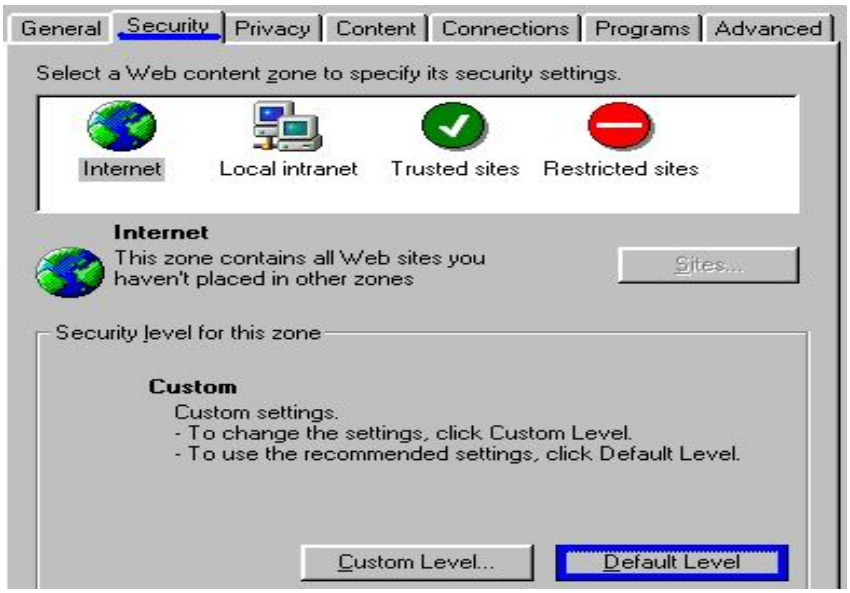
General Security Privacy Content Connections Programs Advanced
Select a Web content zone to specify its security settings.
Internet
Local intranet
Trusted sites
Restricted sites
Internet
This zone contains all Web sites you haven't placed in other zones
Sites...
Security level for this zone
Custom
Custom settings.
- To change the settings, click Custom Level.
- To use the recommended settings, click Default Level.
Custom Level...
Default Level

3. Lower down the security level bar to “Low”, and press “Apply”

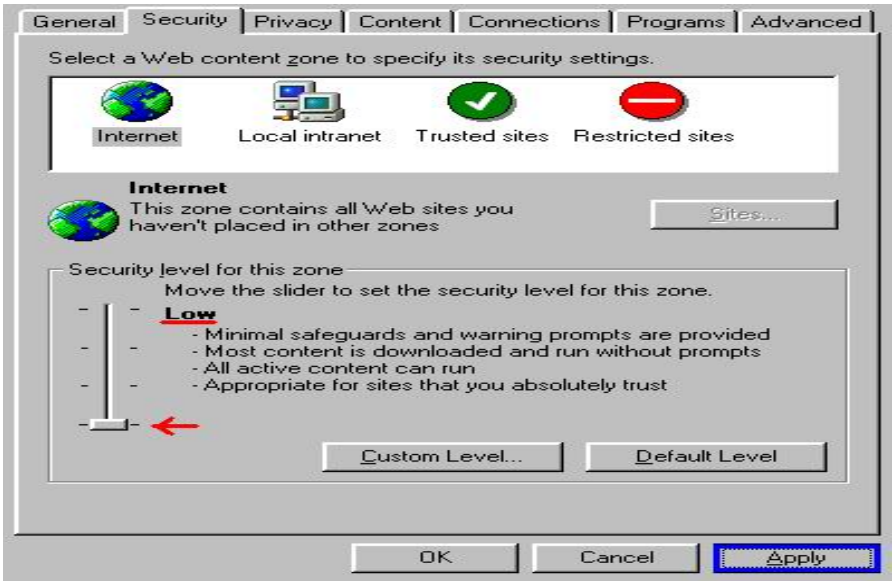

4. Refresh IE Browser, a question frame will pop-up to ask for download Active-X. press “Yes”.

Security Warning
Do you want to install and run "http://192.168.0.99/plugin/h263ctrl.cab"?
The publisher cannot be determined due to the problems below:
Authenticode signature not found.
Yes
No
More Info

8. Client Settings (Windows XP SP2)

1. Initial IE browser, select function item "Tools"→ "Internet Options"

2. Security →"Custom Level"

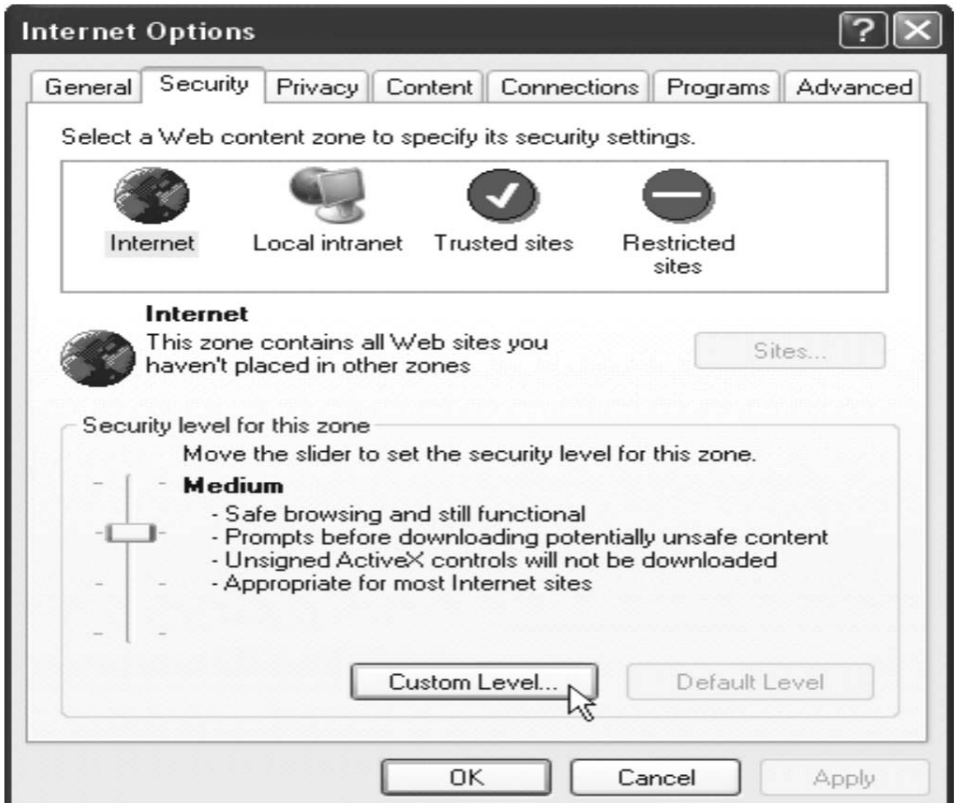
Internet Options
General Security Privacy Content Connections Programs Advanced
Select a Web content zone to specify its security settings.
Internet
Local intranet
Trusted sites
Restricted sites
Internet
This zone contains all Web sites you haven't placed in other zones
Sites...
Security level for this zone
Move the slider to set the security level for this zone.
Medium
- Safe browsing and still functional
- Prompts before downloading potentially unsafe content
- Unsigned ActiveX controls will not be downloaded
- Appropriate for most Internet sites
Custom Level...
Default Level
OK
Cancel
Apply

3. Security Settings → Download unsigned ActiveX Controls set "Enable" and press "OK"

4. Press "Apply" and then "OK"

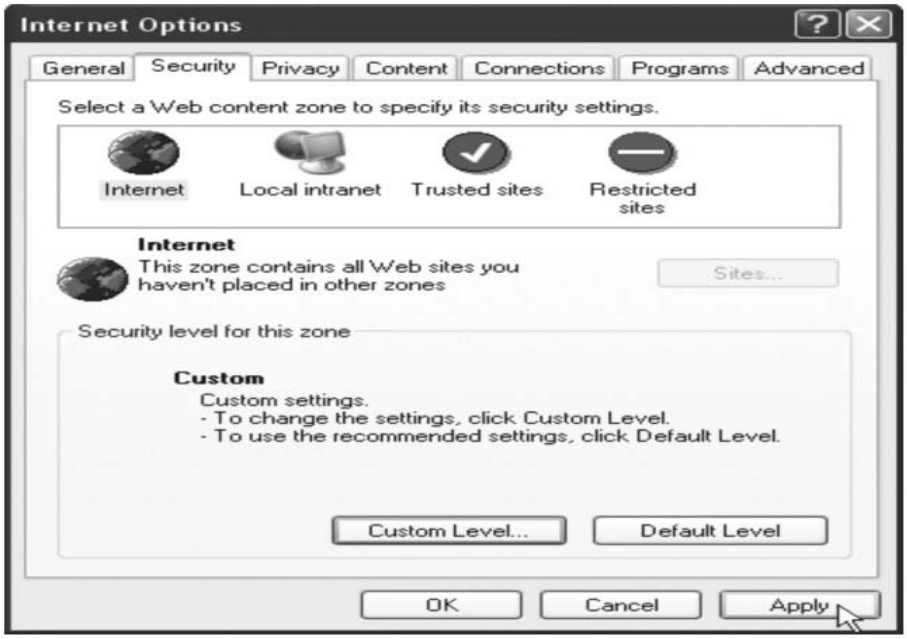

5. Key-In camera's IP address and press "OK" on Information Bar.

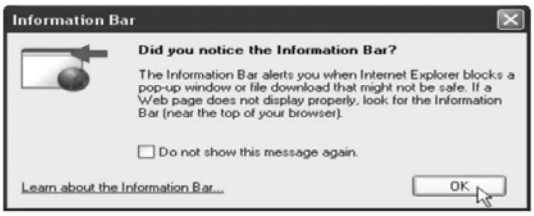
Information Bar
Did you notice the Information Bar?
The Information Bar alerts you when Internet Explorer blocks a pop-up window or file download that might not be safe. If a Web page does not display properly, look for the Information Bar (near the top of your browser).
Do not show this message again.
Learn about the Information Bar...
OK

6. Click the blue bar under the Camera's IP address in the browser, then choose "Install ActiveX Control"

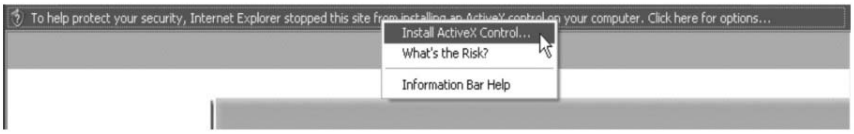
To help protect your security, Internet Explorer stopped this site from installing an ActiveX control on your computer. Click here for options...
Install ActiveX Control...
What's the Risk?
Information Bar Help

7. Recover security settings. Download unsigned ActiveX Controls set "Disable" and press "OK" and "Apply"